


Liquid Propane Burners—Coil Style—Straight Fire

Liquid propane coil style burners are used in many applications like roofing & paving kettles, agricultural weed flaming, welding & process heating, commercial cooking, and special effects. Our burners range from 100,000 btu's to 6 million btu's nominal ratings and can be adjusted to operate higher or lower than the nominal ratings.


M/N	BTU RATING	PRES.	O.D.	LGTH	HEIGHT	WEIGHT
FL-9	100,000 btu/h	25 psi	2-1/4"	11"	5"	5 lbs.
FL-7-S	200,000 btu/h	25 psi	3-1/2"	10"	6-1/2"	5 lbs.
FL-1	500,000 btu/h	25 psi	4-3/4"	13"	7-1/2"	7 lbs.
FL-4	2.0 mil btu/h	25 psi	6"	18"	12"	9 lbs.
FL-6-M	6.0 mil btu/h	25 psi	6-1/2"	23"	8-1/2"	20 lbs.

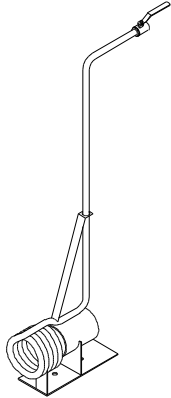

Liquid Propane Burners—Coil Style—Well Fire

Liquid propane well fire burners are used in kettle applications like roofing & paving. When the heating flues are down inside a well or chamber, a well fire style burner works great. Make sure the center line of the flue and the center line of the burner are aligned before you begin.

M/N	BTU RATING	PRES.	O.D.	LGTH	HEIGHT	WEIGHT
FL-7	200,000 btu/h	25 psi	3-1/2"	17"	34"	6 lbs.
FL-2	500,000 btu/h	25 psi	4-3/4"	19"	37"	8 lbs.
FL-5	2.0 mil btu/h	25 psi	6"	24"	37"	16 lbs.

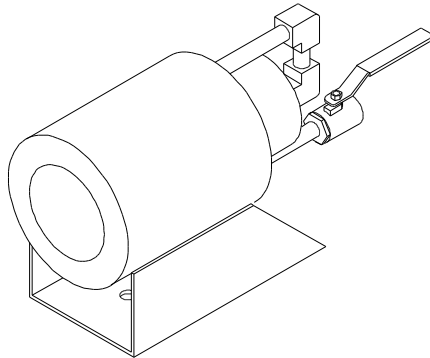


Liquid Propane Burners—Sleeve Style—Straight Fire

Liquid propane sleeve style burners are used in many applications where a longer, narrow flame is required. Typical installations include roofing & paving kettles, asphalt reclamation*, ceramic kilns*, and special effects.

* High heat systems, like ceramic kiln & asphalt reclamation require a stainless steel version. Add "-SS" to the end of the model number for stainless steel option. (example, TK-30-A-SS)


M/N	BTU RATING	PRES.	O.D.	LGTH	HEIGHT	WEIGHT
TK-10-A-SS	100,000 btu/h	25 psi	2-7/8"	16"	5-1/2"	5 lbs.
TK-30-A	500,000 btu/h	25 psi	4-1/2"	10"	5-7/8"	8 lbs.
TK-40-A	1.2 mil btu/h	25 psi	5"	12"	7-1/4"	13 lbs.
TK-50-A-SS	2.0 mil btu/h	25 psi	5"	15"	7-1/4"	16 lbs.



Liquid Propane Burners—Sleeve Style—Well Fire

Liquid propane well fire burners are used in kettle applications like roofing & paving. A well fire style burner is typically used when the heating flues are down inside a well or chamber. Make sure the center line of the flue and the center line of the burner are aligned before you begin.

M/N	BTU RATING	PRES.	O.D.	LGTH	HEIGHT	WEIGHT
TK-31-A	500,000 btu/h	25 psi	4-1/2"	16"	36"	9 lbs.
TK-41-A	1.2 mil btu/h	25 psi	5"	12"	36"	14 lbs.
TK-51-A-SS	2.0 mil btu/h	25 psi	5"	15"	36"	17 lbs.



Liquid Propane Burners—Sleeve Style—Burner Only

Liquid propane sleeve style burner heads can be used as replacements for existing sleeve style burner applications.

* High heat systems, like ceramic kiln & asphalt reclamation require a stainless steel version. Add "-SS" to the end of the model number for stainless steel option. (example, TK-30-SS)

M/N	BTU RATING	PRES.	O.D.	LGTH	HEIGHT	WEIGHT
TK-30	500,000 btu/h	25 psi	4-1/2"	9"	4-1/2"	6 lbs.
TK-40	1.2 mil btu/h	25 psi	5"	10"	5"	11 lbs.
TK-50-SS	2.0 mil btu/h	25 psi	5"	13"	5"	14 lbs.