


Safety - Manual
Two different styles, 1/4"mpt inlet & outlet, brass body:

- H-100 with pilot port (similar to Johnson H19NA-4)
- H-100-NP no pilot (similar to Johnson H19TA-3)


These safety controls must be used with a thermocouple and are only to be used for vapor service. Contact our customer service department for application assistance.

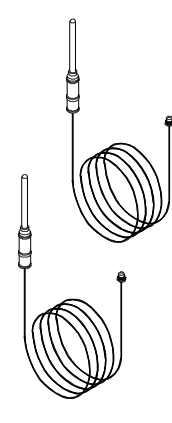

Thermocouples
Our thermocouples are manufactured by Johnson Controls and are UL Listed.

- 18" : p/n - 216118
- 24" : p/n - 216124
- 36" : p/n - 216130
- 48" : p/n - 216148
- 60" : p/n - 216260
- 72" : p/n - 216272

Ignitors & Flame Rods

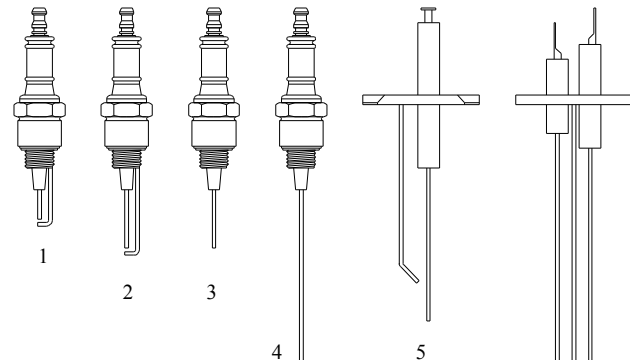

- 1
- 2
- 3
- 4
- 5
- 6


- 1. I-31, Spark Ignitor
- 2. I-31-1, Spark Ignitor
- 3. I-33, Flame Rod - 1"
- 4. I-33-4, Flame Rod - 4"
- 5. 659, Fenwal Ignitor
- 6. 593, Fenwal Ignitor / Flame Rod Assy

Packing Nut

This packing nut is used to allow a capillary tube or thermocouple wire to be safely routed into a thermowell and minimize the loose of high temp. oil.

1/2" mpt threads


p/n: 307515

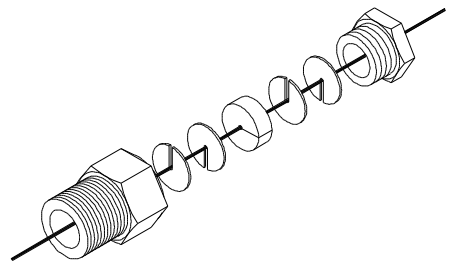


Valves - Special

We have a number of different specialty valves for a number of different applications. Please call our customer service department for assistance in your application

- Squeeze Trigger Valve Assy. part no. - 728140
- Brass valve body. p/n-954214
- Lever bracket only. p/n - 954950

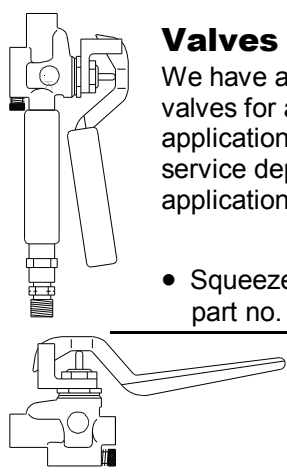

Temperature Controls

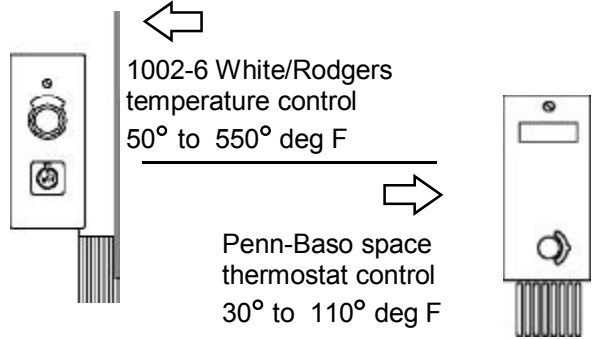

1002-6 White/Rodgers temperature control
50° to 550° deg F

Penn-Baso space thermostat control
30° to 110° deg F

Solenoids

UL Listed, 1/4"npt inlet & outlet.

- 12VDC - p/n 956126
- 115VAC (vapor) - p/n 956125
- 115VAC (liquid) - p/n 956124

Other sizes available.

