


FV-80 Vapor Burner

Our FV-80, well fired, vapor propane burner is an excellent burner for asphalt tanks and tar kettles

NOTE - The FV-80 is a high performance, vapor propane burner. This burner requires a large propane supply tank (or multiple tanks manifolded together) to provide sufficient vapor propane to operate correctly. (Recommended 1,000 gallon or larger propane tank)

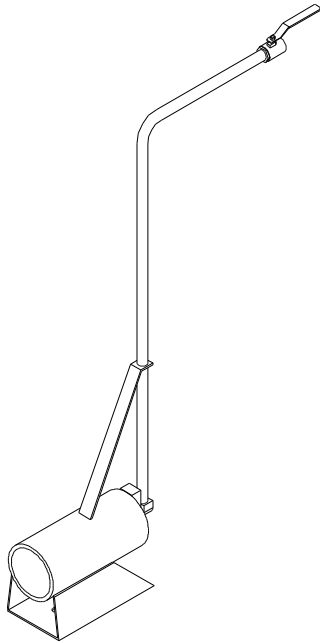

Specifications	
BTU Rating	800,000 @ 25psi Can operate on Tank Pressure
Fuel	Vapor L.P.Gas (propane)
Fuel Connection	9/16"-18 LH (ball seat)
Sleeve—Diameter	3-1/2"
Gas Pipe—Material	3/8" Mild Steel Pipe
Length	23"
Height	32"
Base	4" x 8"
Weight	9 lbs
Color	Grey

- Operates on tank pressure
- Fully welded construction
- Every unit is function tested
- Shipped with HD brass valve
- Preset air intake
- Mounting hole in base
- Easy installation

GUARANTEE

ALL EQUIPMENT IS GUARANTEED TO BE FREE FROM DEFECT IN EITHER MATERIAL OR WORKMANSHIP. ALL EQUIPMENT IS GUARANTEED TO THE EXTENT OF OPERATING SPECIFICATIONS OF THE EQUIPMENT. NO CLAIM WILL BE ALLOWED FOR SUBSEQUENT DAMAGE CAUSED BY IMPROPER INSTALLATION, IMPROPER USE (MISUSE), NEGLIGENCE, OR IMPROPER FUEL AND/OR ELECTRICAL SUPPLY (IF APPLICABLE).

While this information is presented in good faith and believed to be accurate - Burners, Inc. does not guarantee satisfactory results from reliance upon such information. Nothing contained within this document is to be construed as a warranty or guarantee, expressed or implied, regarding the performance, merchantability, fitness or any other matter with respect to this product, nor as a recommendation to use this product in a specific application. Burners, Inc. reserves the right, without notice, to alter, or improve the designs or specifications of this product, described herein. Rev.: April, 2003